



*professional tractor powered mowing equipment*

# Stealth<sup>S2</sup>

*Stealth set the benchmark for wing mowers in 1992. Already known for its cost effectiveness, safe operation, productivity and unparalleled reliability, the Stealth is now even better.*

## *The benchmark has now been raised with **Stealth Series 2***

*With downwing flotation, simple and infinitely variable height adjustment, full width striping, innovative new maintenance features and LazerBladez™, the StealthS2 will continue to set the standard for many years to come.*



*Rollers allow mowing along edges.*



*Handles infrequently mown long grass with ease.*

reliability and productivity built in... just add tractor!

## Spread your wings

Downwing flotation allows some movement of the mower wings below horizontal, which when combined with upwing flotation allows the StealthS2 to follow undulating terrain with ease.

With Trimax's unique CLAWS (Controlled Link Active Wingbounce Suppression) system, wing movement can be damped to hold the wings in contact with the ground when mowing large flat areas or set to allow unrestricted float over undulating ground.

*Full width rollers provide a brilliant full stripe effect for sports turf and golf courses alike.*



*The StealthS2 can be operated with one or both wings raised, giving the added versatility of three cutting widths in one mower.*



*Trimax LazerBladez™ fling-tip blade, blade bolt and self locking nut.*

## Safe rollers

Roller-mowers are significantly safer than non-roller rotary mowers as thrown debris is contained within the cutting chamber. The rollers also allow operators to confidently mow along pathways, kerbs or the edges of banks, reducing the need for other mowing operations.

Small 'bubble' rollers located at the front of the wings are set just clear of the ground to provide anti-scalp protection without affecting the cut.

## Easy adjustment and maintenance


Complicated height adjustment is a thing of the past with StealthS2's simple and infinitely variable system. Height adjustment is now fast and easy.

Maintenance with StealthS2 is a breeze due to Trimax's innovative details. All grease points are accessible with the mower wings up and automatic belt tensioners are standard. The custom roller bearing greasing system also increases bearing life. This adds up to less maintenance and greater productivity.

Overall design enhancements and the introduction of LazerBladez™ has resulted in a machine with superior all round performance.

Beyond its flowing lines and good looks the Trimax StealthS2 is packed with innovative details that focus on long-term cost effectiveness. Performing as a general amenity mower or grooming high profile sports grounds, StealthS2 is set to enhance its predecessor's status as the benchmark wing roller mower.

*Infinitely variable height adjustment.*

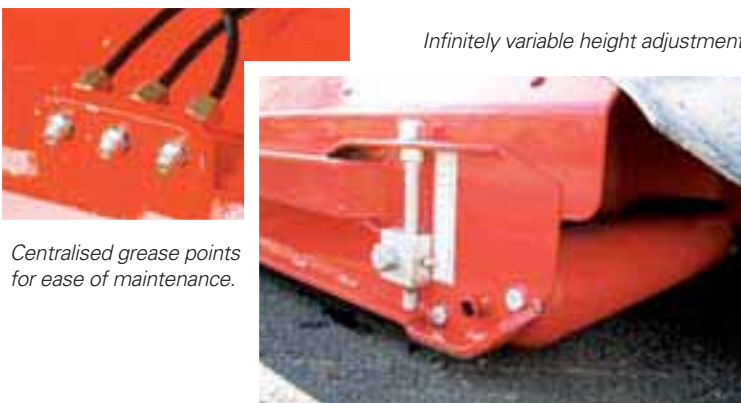

*Centralised grease points for ease of maintenance.*

*Transport mode.*




# Specifications

The manufacturer has a policy of continuous improvement, therefore specifications may change without notice.

DESIGNED & MANUFACTURED IN  
**NEW ZEALAND**

- Ⓐ **Wings**  
Downwing float for contour following  
CLAWS wingbounce control
- Ⓑ **Blades**  
LazerBladez™ unique 'tilt-forward' design  
Exceptional blade and bolt life  
Optimum performance in heavy conditions
- Ⓒ **Blade spindles**  
2 year warranty
- Ⓓ **Centralised grease points**  
All grease points accessible with the wings up
- Ⓔ **Cutting height**  
Infinitely variable height adjustment  
Simple to use
- Ⓕ **Rollers**  
Full width for full striping effect  
Domed ends to minimise scuffing on turns
- Ⓖ **Gearbox**  
2 year warranty
- Ⓗ **Body**  
Strong monocoquular construction
- Ⓘ **Belt drive**  
Automatic tensioners  
Stainless steel transmission covers

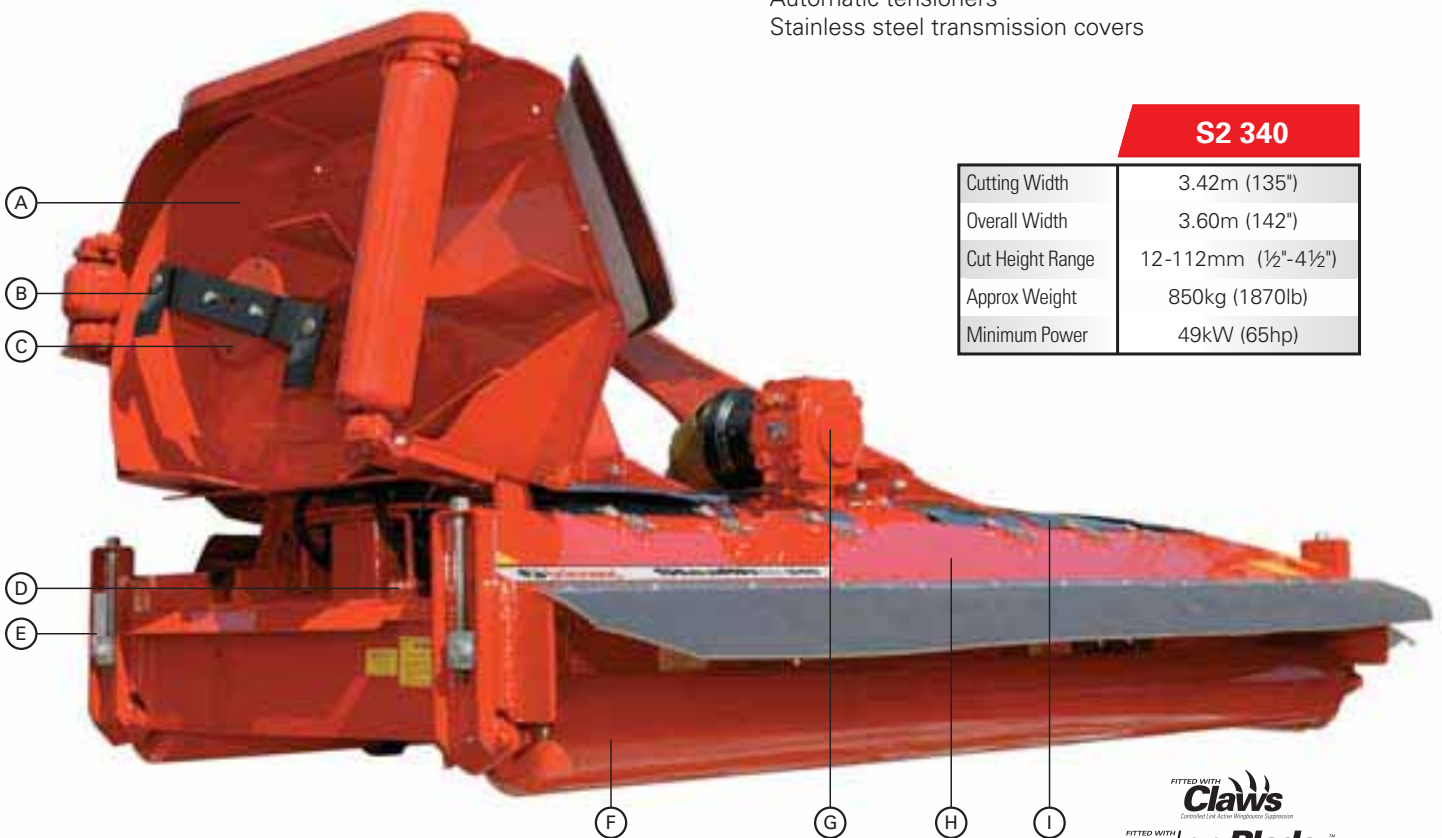

## S2 340

Cutting Width	3.42m (135")
Overall Width	3.60m (142")
Cut Height Range	12-112mm (½"-4½")
Approx Weight	850kg (1870lb)
Minimum Power	49kW (65hp)

**WARNING:** Machinery shown in this publication may have protective guards removed for demonstration purposes. Trimax strongly recommends the use of safety guards and shields during normal operation to reduce the risk of property damage, serious bodily injury or even death from objects thrown out by, or from contact with the cutting blades.

*insist on Trimax*  
**Genuine Parts**



[www.trimaxmowers.com](http://www.trimaxmowers.com)

### New Zealand

70 Maleme Street  
PO Box 2150, Tauranga 3001  
New Zealand

phone: +64 7 541 0411 (SALES/ADMIN)  
phone: +64 7 543 1897 (PARTS)  
fax: +64 7 541 0412  
email: [sales@trimaxmowers.co.nz](mailto:sales@trimaxmowers.co.nz)

### United Kingdom

Unit 11B, Hill Farm Estate, Irthlingborough Road  
Little Addington, Kettering, Northamptonshire  
NN14 4AS, United Kingdom

phone: 01933 652235 (SALES/ADMIN)  
phone: 01933 652246 (PARTS)  
fax: 01933 652254  
email: [info@trimaxmowers.co.uk](mailto:info@trimaxmowers.co.uk)

Your nearest authorised dealer:

