



**NEW**



*professional tractor powered mowing equipment*

# Topper<sup>S2</sup><sup>TM</sup>

*Completely redesigned and offering numerous innovative features, the Topper Series 2 is set to become the new industry standard for agricultural topping mowers.*



*the new industry standard*

*...just add tractor!*


The Trimax Topper Series 2 pasture topping mower cuts pasture grass quickly and efficiently. Small diameter blades turning at high speed mean more cuts per metre of travel and less distance to move cut material before it is ejected. Very high underbody clearance guarantees low horsepower requirements and Trimax's exclusive Anti-Block System (ABS) prevents frustrating blockages in extreme conditions. The TopperS2's short front to rear distance keeps the overall weight as close as possible to the tractor and allows for superior contour following. This also allows the use of smaller tractors for large cut widths and a smaller turning radius for easier access into tight corners.

### All new twin belt drive system

Trimax has improved overall performance by upgrading to an all new drive system that is designed specifically for use with today's higher powered tractors. Twin belts transfer power from the gearbox directly to each spindle, providing maximum torque even in the heaviest conditions. Tensioning the belts is incredibly easy and is now done from the rear of the mower without the need to remove any covers.



*The floating headstock is ideal for uneven terrain*

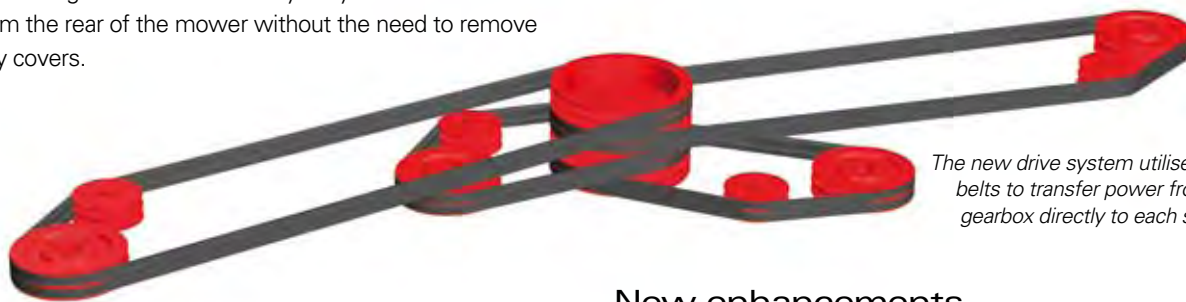

*The new drive system utilises twin belts to transfer power from the gearbox directly to each spindle*

*Coarse foliage is easily handled due to high blade tip speed*



### New enhancements

Several enhancements to the TopperS2 design mean it is now much easier to clean, maintain and service. Remote greasing for spindles, a fully sealed transmission chamber with hinged wash vents and hinged muck protectors are all fitted as standard.

### Heavy duty – high efficiency

The super heavy duty spindles have a two year warranty and are fitted with Trimax's exclusive LazerBladez™ fling tip blades. The tilt-forward design of LazerBladez™ virtually eliminates hang back ensuring the cleanest and most efficient cut possible, even in the toughest conditions. Built to last, the Trimax TopperS2 is your ideal pasture topping partner.



*Trimax LazerBladez™ are fitted as standard on the Topper Series 2.*

# Specifications

The manufacturer has a policy of continuous improvement, therefore specifications may change without notice.

DESIGNED & MANUFACTURED IN  
**NEW ZEALAND**


	T2 237	T2 282	T2 340
Cutting Width	2.29m	2.71m	3.38m
Overall Width	2.43m	2.85m	3.52m
Overall Length	1.35m	1.35m	1.35m
Spindles	4	4	5
Min Power	50hp	60hp	70hp
Approx. Weight	670kg	720kg	840kg

- (A) Body**  
Super strong steel monocoque construction.
- (B) Gearbox**  
Two year warranty.
- (C) Headstock**  
Floating headstock for ground contour following.  
Steel cable backstay.

- (D) Transmission**  
New 'true' twin belt drive system.  
Designed for use with large agricultural tractors.  
Sealed transmission chamber.  
Hinged vents can be opened to allow the chamber to fully drain when washed.
- (E) Cutting height**  
Infinite adjustment over a wide range of settings.  
New, stronger height adjuster block mountings.  
Cut height range from 25mm to 165mm.

- (F) Side skirts**  
Solid 'D' section steel skirts minimise pasture damage on turns.  
Proven for longer life compared with hollow section skirts.
- (G) Remote spindle grease points**  
No need to lift covers.
- (H) Spindles**  
Two year warranty on spindle assemblies.  
Built for extreme reliability.  
Anti-Block System prevents frustrating blockages in extreme conditions.
- (I) Blades**  
Trimax's famous LazerBladez™.  
Exceptional blade and bolt life.  
Choose from flat or uplift styles to suit the conditions.
- (J) Under body design**  
Extremely efficient.  
Baffles give even grass spread with minimal windrows.
- (K) Hinged muck protectors**  
Can be folded up when topping tall thistles or stalky matter.

EQUIPPED WITH  
**ABS** Anti Block System

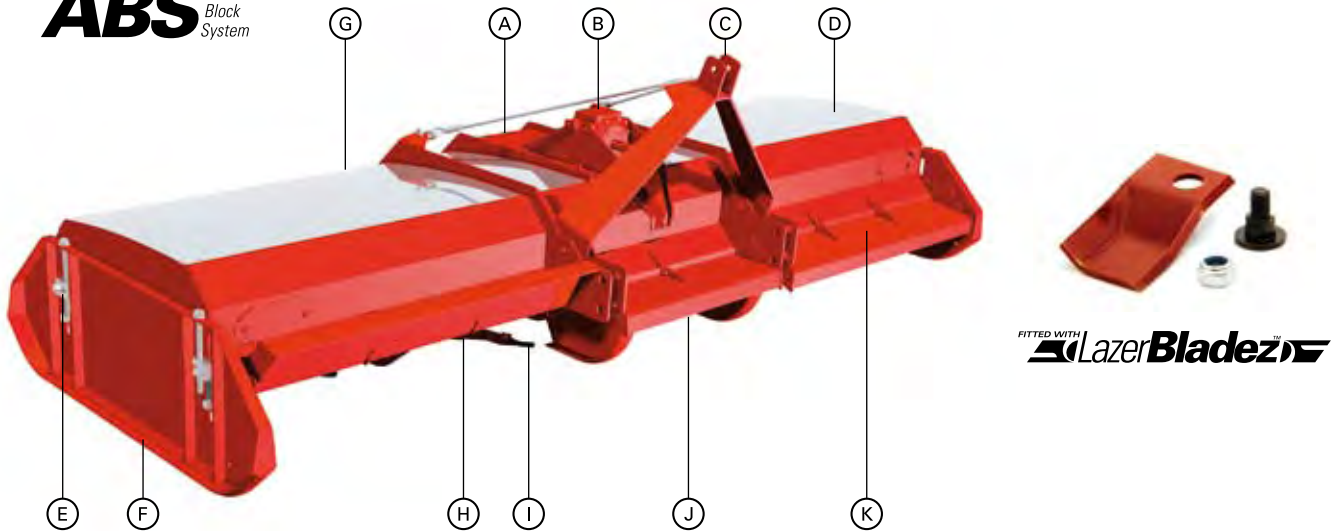

**WARNING:** Machinery shown in this publication may have protective guards removed for demonstration purposes. Trimax strongly recommends the use of safety guards and shields during normal operation to reduce the risk of property damage, serious bodily injury or even death from objects thrown out by, or from contact with the cutting blades.

insist on Trimax  
**Genuine Parts**



[www.trimaxmowers.com](http://www.trimaxmowers.com)

## New Zealand

70 Maleme Street  
PO Box 2150, Tauranga 3041  
New Zealand

phone: +64 7 541 0411 (SALES/ADMIN)  
phone: +64 7 543 1897 (PARTS)  
fax: +64 7 541 0412

email: [sales@trimaxmowers.co.nz](mailto:sales@trimaxmowers.co.nz)

Your nearest authorised dealer:

